




STEEL WIRE REINFORCED CONCRETE

Hose for Placement of Concrete to the Casting Locations

Abrasion loss value: Acc DIN 53516 < 65 mm³

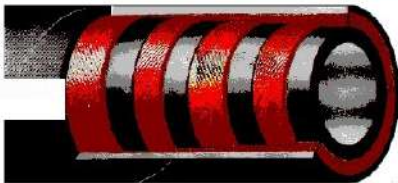

- Inner tube:** seamless special synthetic rubber resistant to abrasion
- Reinforcement:** high tensile steel cords
- Outer tube:** black, weather and abrasion resistant pin-pricked synthetic rubber
- Safety factor:** 2.3: 1
- Application:** placement of concrete to the casting locations
- Temperature range:** - 40°C (- 40°F) + 70°C (+ 158°F)

Ø nom	dash size	Ø internal		Ø external		working pressure		min. burst pressure		min. bend radius		weight
		mm	inch	mm	inch	MPa	PSI	MPa	PSI	mm	inch	
2"	- 32	50,8	2.00	70,0	2.76	8.5	1232	20	2900	510	20.1	3,41
2.1/2"	- 40	63,5	2.50	88,0	3.46	8.5	1232	20	2900	635	25.0	4,97
3"	- 48	76,0	3.00	102,0	4.02	8.5	1232	20	2900	762	30.0	6,58
4"	- 64	101,0	3.98	130,0	5.12	8.5	1232	20	2900	1016	40.0	9,38
5"	- 80	127,0	5.00	155,0	6.10	8.5	1232	20	2900	1270	50.0	10,95
6"	- 96	152,0	5.98	184,0	7.24	8.5	1232	20	2900	1524	60.0	13,49

Can be supplied already assembly, with fittings, upon request