



**BACRUFLEX**

Al servicio de la minería,  
pesquería e industria

Catálogo de productos

**VÁLVULAS  
COMPUERTAS  
BRIDADAS**

**REX**<sup>®</sup>

**Gate Cast Iron A126  
200 PSI - WATER USE ONLY**

Body and Bonnet Cast Iron A126  
Bolted Bonnet  
Rising Stem OS&Y  
Design, Manufacture, Test in accordance with  
MSS-SP-70  
Flange dimensions: ANSI/ASME B16.1  
Face to Face dimensions: ANSI/ASME B16.10  
Hydrostatic Testing API 598  
Diameters: 2" to 24"

Water use only

*\* Certification pending to norm MSS-SP-70 from Manufacturers  
Standardization Society (MSS)*



\* Reference photo




**REX**<sup>®</sup>

# Gate Cast Iron A126 200 PSI - WATER USE ONLY

## MATERIALS

	PART NAME	MATERIAL
1	BODY, BONNET	ASTM A126B
2	SEAT RING	ASTM B62
3	WEDGE	ASTM A126B + ASTM B62
4	STEM	SS 410
5	BOLT/NUT	ASTM A307-B
6	GASKET	GRAPHITE WITH SOFT STEEL
7	PACKING	GRAPHITE
8	STEM NUT	ASTM B62

TEST API 598

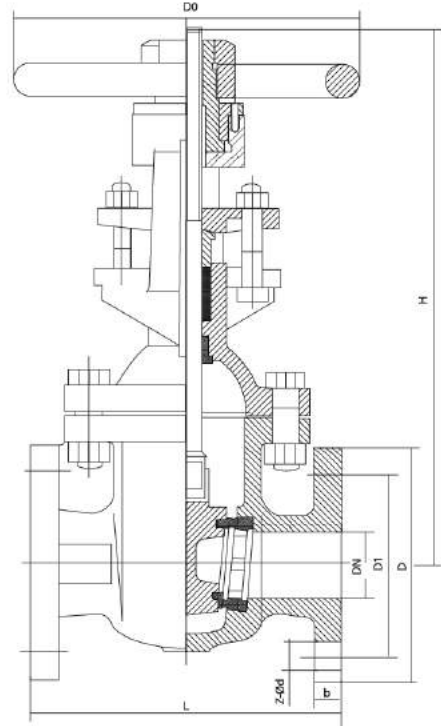

## DIMENSIONS (mm)

SIZE	L	D	D <sub>1</sub>	b	Z-ød	D <sub>0</sub>	H	WEIGHT (KG)
1 1/2"	165	127	98.6	14.3	4-16	180	290	16
2"	178	152	121	16	4-19	200	320	19
2 1/2"	191	178	140	18	4-19	200	345	26
3"	203	191	152	19	4-19	200	387	29
4"	229	229	191	24	8-19	260	490	50
5"	254	254	216	24	8-22	300	576	71
6"	267	279	241	25.4	8-22	300	680	88
8"	292	343	298	29	8-22	350	808	136
10"	330	406	362	30.2	12-25	400	1010	214
12"	356	483	432	32	12-25	450	1080	294
14"	381	533	476	35	12-29	508	1640	450
16"	406	597	540	36.5	16-29	558	1804	580
18"	432	635	578	39.7	16-32	610	2090	760
20"	457	699	635	42.9	20-32	610	2490	935
24"	508	813	749	47.6	20-35	762	2960	1230
30"	610	984	914	54	28-35	762	3340	2510
36"	711	1168	1086	60.3	32-42	762	3680	3980