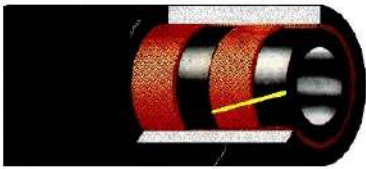


**BACRUFLEX**Al servicio de la minería,
pesquería e industria

Catálogo de productos

**MANGUERAS
HIDRÁULICAS****SANDBLAST –****Rigid rubber mandrel hose for Sandblasting / Gravel 1.2MPa / 175PSI****Reinforced with several high resistance synthetic fiber braids and antistatic copper line****Inner tube:** seamless synthetic rubber high abrasion resistant to sand with antistatic characteristics; abrasion acc. DIN 53516: approx. 65 mm³**Reinforcement:** several high resistance synthetic fiber braids**Outer tube:** black, weather and abrasion resistant synthetic rubber, with antistatic copper line**Safety factor:** 3: 1**Application:** sandblasting**Temperature range:** - 40°C (- 40°F) + 100°C (+ 212°F)

Ø nom	dash size	Ø internal		Ø external		working pressure		min. burst pressure		min. bend radius		weight
		mm	inch	mm	inch	MPa	PSI	MPa	PSI	mm	inch	
1/2"	- 8	12,7	0.50	27,0	1.06	1.2	175	3.6	525	130	5.2	0,52
3/4"	- 12	19,0	0.75	34,0	1.34	1.2	175	3.6	525	230	9.1	0,60
1"	- 16	25,4	1.00	40,0	1.57	1.2	175	3.6	525	254	10.0	1,03
1.1/4"	- 20	31,8	1.25	48,0	1.89	1.2	175	3.6	525	320	12.6	1,40
1.1/2"	- 24	38,1	1.50	54,0	2.13	1.2	175	3.6	525	380	15.0	1,55
2"	- 32	50,8	2.00	71,0	2.80	1.2	175	3.6	525	510	20.1	2,02