



BACRUFLEX
Al servicio de la minería,
pesquería e industria

Catálogo de productos


**MANGUERAS
HIDRÁULICAS**

TrAle®

Hydraulic hoses TrAle

TrAle steel braid

EN 857 2SC Hose

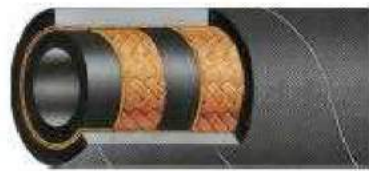

Composition:

- Inner tube: special synthetic rubber resistant to mineral, vegetable and hydraulic oil.
- Reinforcement: two braids of steel wire.
- Cover: synthetic rubber resistant to oil, abrasion and weather.

Working temperature: From -40° C to +100° C.

Part n°	DN	Ø in	Ø out	Working Pressure (bar)	Working pressure (psi)	Burst pressure (bar)	Burst pressure (psi)	Vacuum (bar)	Bending radius (mm)	Weight (kg/m)
M2SC04	1/4"	6,6	13	400	5800	1600	23200	-0,95	75	0,25
M2SC05	5/16"	8,3	14,6	350	5075	1400	22050	-0,95	85	0,30
M2SC06	3/8"	9,9	16,6	330	4785	1320	19140	-0,95	90	0,37
M2SC08	1/2"	13	20	275	3990	1100	15950	-0,95	130	0,45
M2SC10	5/8"	16,4	23,9	250	3625	1000	14500	-0,80	170	0,61
M2SC12	3/4"	19,5	27,6	215	3120	860	12470	-0,80	200	0,76
M2SC16	1"	26	35,6	165	2395	660	9570	-0,80	250	1,15